


# SOA0980080YY25DBXXXX

## Broad-band Semiconductor Optical Amplifier

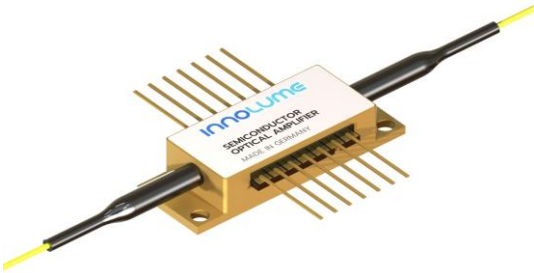

**Features:**

- Broad-band gain (80nm)
- 25dB gain and 17dBm saturation output power at wavelength of gain maximum
- Low ripples
- Strong linear polarization
- RoHS compliance
- Proprietary anti-reflection coating technology enabling high reliability
- Polarization maintaining PM980 fiber or HI1060 fiber
- 900um loose tube on fiber (optional)

**Applications:**

- Swept-source, tunable lasers
- Optical preamplifiers
- Optical coherence tomography (OCT)

### Recommended Operating Conditions

@ CW, the case is mounted on room temperature heatsink

Parameter	Min.	Typ.	Max.	Unit
Chip Temperature	20	25	30	°C
Forward Current		500*	600	mA
Input Optical Power	-40	-25	10	dBm

\* - current for maximum gain spectrum width might vary between batches

### Gain Characteristics

@ CW, 25°C, 500mA\*, with input signal -25dBm @ wavelength of gain maximum

Parameter	Min.	Typ.	Max.	Unit
Small Signal Gain @ 600mA	22	25		dB
Saturation Output Power (-3dB) @ 600mA	14	17		dBm
Gain Mean Wavelength	970	980	990	nm
Gain Bandwidth (FWHM)	60	80		nm
Gain Spectrum Dip		1		dB
Noise Figure**		6.5		dB

\*\* - NF = 10log10(2p\_ase/Ghv) [D.Baney et al., Optical Fiber Techn. 6, 122 (2000)]

### Amplified Spontaneous Emission (ASE) Characteristics

@ CW, 25°C, 500mA\*, no input signal

Parameter	Min.	Typ.	Max.	Unit
Output Power (each port)		10		mW
Forward Voltage		1.7	2	V
Mean Wavelength		980		nm
Bandwidth (FWHM)		80		nm
Spectrum Dip		1		dB
Ground State Maximum Position		1010		nm
Excited State Maximum Position		940		nm
Ripples*** (RMS)		0.02	0.2	dB
Polarisation Extinction Ratio (PER)	13	15		dB
Polarization		TE		

\*\*\* - measured in 1nm span around spectrum maximum with 20pm resolution


### Absolute Maximum Ratings

Parameter	Min	Max	Unit
Output Optical Power		300	mW
Input Optical Power		15	dBm
Forward Current		700	mA
Reverse Voltage		2	V
TEC Current		3	A
TEC Voltage		4	V
Chip Operating Temperature	10	40	°C
Case Operating Temperature	0	70	°C
Storage Temperature	-40	85	°C
Pin Soldering Temperature (max 10 sec, max case temperature 120°C)		300	°C
Fiber Band Radius	3		cm


### Typical Performance (for reference only)

@ CW, the case is mounted on room temperature heatsink


#### Gain spectra at different currents

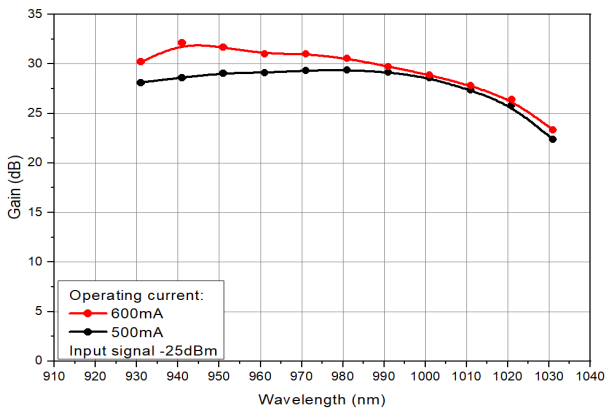


#### Gain vs. Input signal

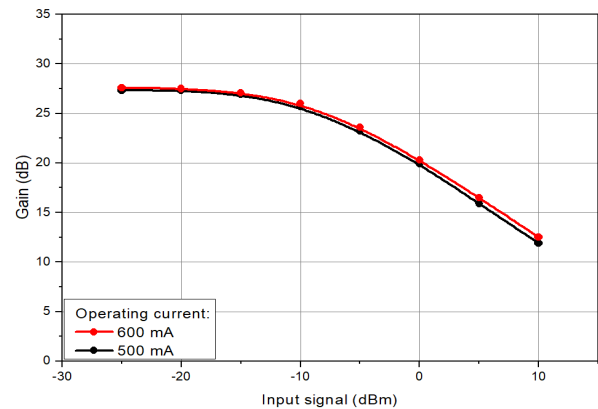


#### Gain spectra at different input signals

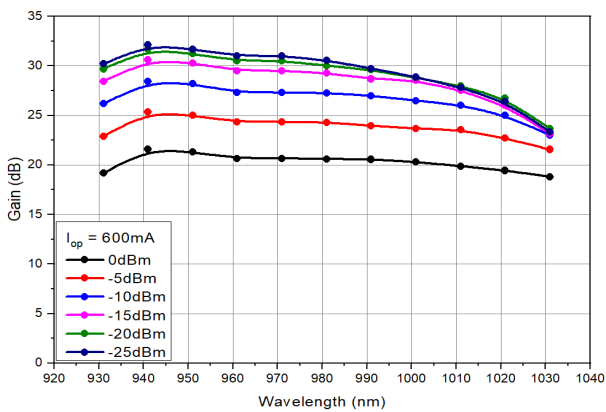


#### Spectra of amplified optical signal

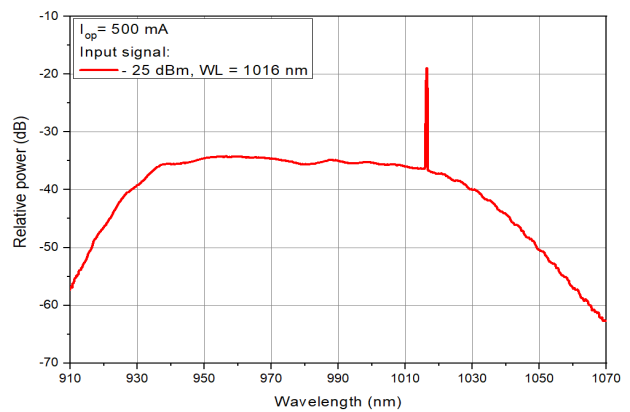


### ASE Spectra (no input signal)

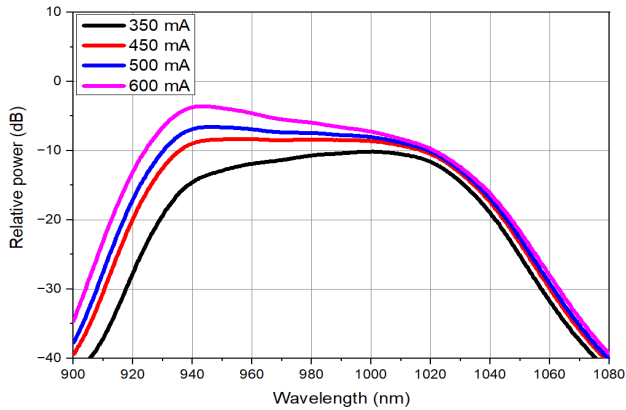

### Output power at different input signals

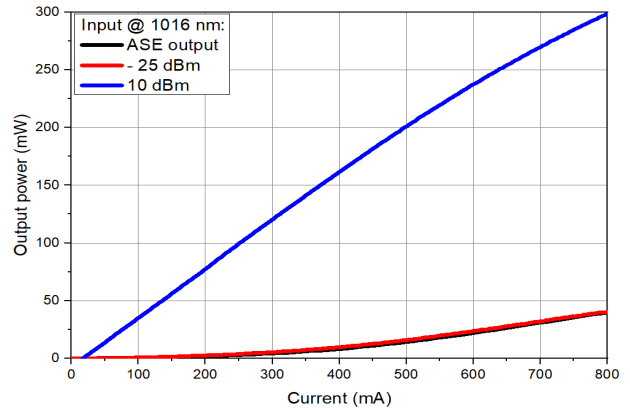


Thermistor specification			Fiber specification			
Parameters	Value	Unit	Parameters	Value	Value	Unit
Type	NTC		Fiber Type	HI1060	PM980	
Resistance @ 25°C	10±0.1	kOhm	Numerical Aperture (Typical)	0.14	0.12	
Beta 25-85°C	3435±1%	K	Cut-off Wavelength	920±50	900±70	nm
			Mode-Field (core) Diameter	6.2±0.3 @1060nm	6.6±0.3 @1060nm	µm
			Cladding Diameter	125±1	125±1	µm
			Coating (buffer) Diameter	245±15	245±15	µm
			Loose Tube Diameter (optional)	900	900	µm
			Connector	FC/APC	FC/APC	
			Key	narrow	narrow	



The output light is polarized along the slow axis of PM fiber.

### Dimensions (in mm)

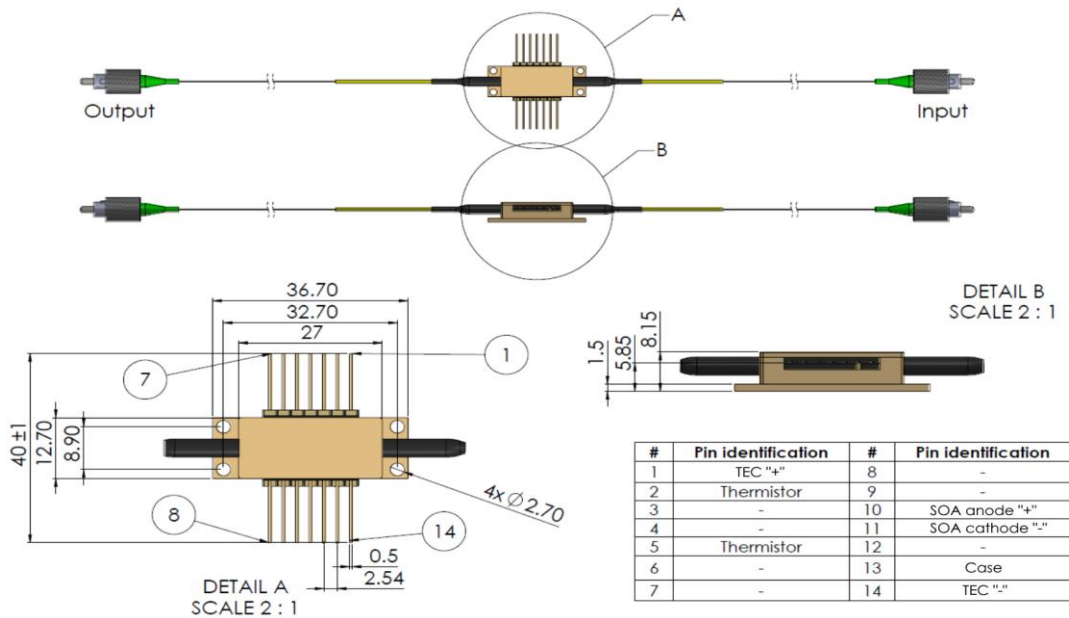

### Safety and Operating Instructions


The light emitted from this device is invisible and can be harmful to the human eye. Avoid looking directly into the fiber connector when the device is in operation. Proper laser safety eyewear must be worn during operation with open connector. Absolute Maximum Ratings may be applied to the device for short period of time only. Exposure to maximum ratings for extended period of time or exposure to more than one maximum rating may cause damage or affect the reliability of the device. Operating the device outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with the component must be employed such that the maximum forward current cannot be exceeded.

A proper heatsink for the device on thermal radiator is required. The device must be mounted on radiator with 4 screws (bolt down in X-style fashion with initial torque set to 0.075Nm and final X-style bolt down at 0.15Nm) or with clamps. The deviation from flatness of radiator surface must be less than 0.05mm. It's recommended using of Indium foil or thermal conductive and soft material between bottom of the case and heatsink for thermal interface. It's undesirable to use thermal grease for this.

Avoid back reflection to the device. It may give impact on the device performance in aspects of spectrum and power stability. It also may cause fatal facet damage. Using of optical isolators is highly recommended to block back reflection.

Do not pull the fiber. Do not bend a fiber with a radius smaller than 3 cm. Fiber tip should always be protected from any contamination or damage during the process of installation. After removing the dust-preventing cap covered at fiber tip, carefully clean fiber tip by wiping through one direction using optical lens cleaning paper or cotton swab dabbed with Iso-Propanol or Ethyl alcohol. Operate the device with clean fiber connector only.

ESD PROTECTION - Electrostatic discharge is the primary cause of unexpected product failure. Take extreme precaution to prevent ESD. During device installation, ESD protection has to be maintained - use wrist straps, grounded work surfaces and rigorous antistatic techniques when handling the product.

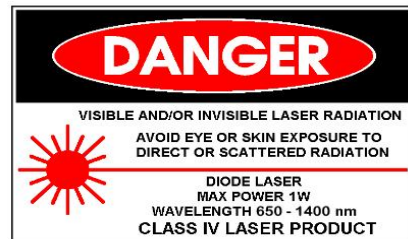

**Part-number Identification**

SOA98080HI30DBXXXX -> 980nm gain mean wavelength, 80nm gain bandwidth, 30dB gain at wavelength of gain maximum, HI-1060 fiber

SOA98080PM30DBLXXX -> 980nm gain mean wavelength, 80nm gain bandwidth, 30dB gain at wavelength of gain maximum, PM-980 fiber, with loose tube

**NOTE:** Innolume product specifications are subject to change without notice